CorrosionForce II

96234914 CORRF2 1X28W T16 HF TW L000

THORN

CorrosionForce II

A high performance IP65 dust and moisture resistant luminaire for aggressive atmospheres. For 1 x 28W Light Source: 1 x T16 / 28W lamp(s) with electronic - fixed output circuit. Class I electrical. Canopy in light grey glass fibre reinforced polyester. Diffuser in acrylic with internal prisms. For surface or suspended mounting. Quick-fix installation brackets are supplied for surface mounting, optional accessory kits are avalable to help with other mounting options. Equipped with through wiring kit. Lamps to be ordered separately.

Dimensions: 1294 x 112 x 112 mm
Luminaire input power: 31.5 W
Weight: 1.9 kg

TLG_XFRC_F_COL2.jpg

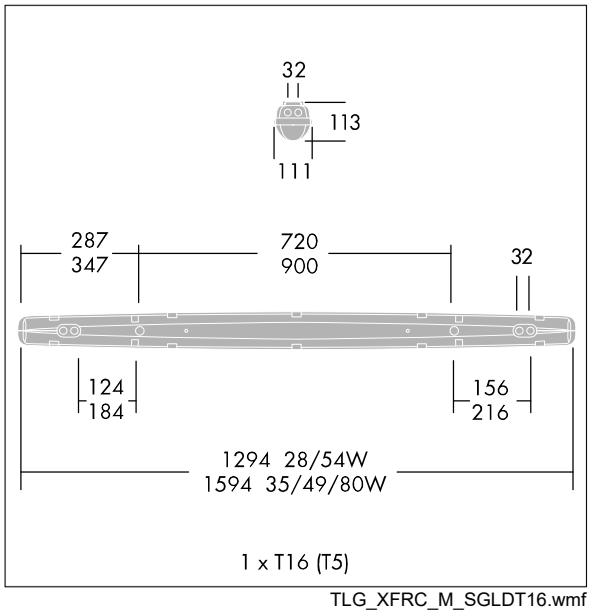

TLG_XFRC_M_SGLDT16.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting