IndiQuattro

96548455 <IQ 4x14W T16 HF E3 OP L840

THORN

IndiQuattro

Recessed modular direct/indirect luminaire for 4 x 14W Light Source: 4 x T16 / 14W lamp(s) with Combined HF & EM SC and 3 hour manual test emergency lighting circuit. Body and coffer in white painted steel with reeded opal acrylic diffuser. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 4 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 67 W
Weight: 4.4 kg
Luminaire efficacy: 44 lm/W

TLG_INDQ_F_B1X55WLVROP.jpg

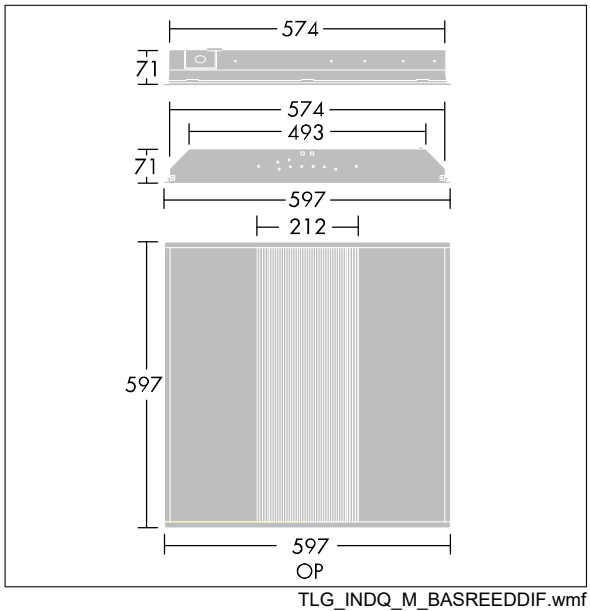

TLG_INDQ_M_BASREEDDIF.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting