CorrosionForce II

96240455 CORRF2 1X28W T16 HFI E3 L000

THORN

CorrosionForce II

A high performance IP65 dust and moisture resistant luminaire for aggressive atmospheres. For 1 x 28W Light Source: 1 x T16 / 28W lamp(s) with Electronic, DALI / DSI digital dimmable control gear circuit and integral 3 hour manual test emergency lighting function. Class I electrical. Canopy in light grey glass fibre reinforced polyester. Diffuser in acrylic with internal prisms. For surface or suspended mounting. Quick-fix installation brackets are supplied for surface mounting, optional accessory kits are avalable to help with other mounting options.

Dimensions: 1294 x 112 x 112 mm
Luminaire input power: 30.5 W
Weight: 2.65 kg

TLG_XFRC_F_COL2.jpg

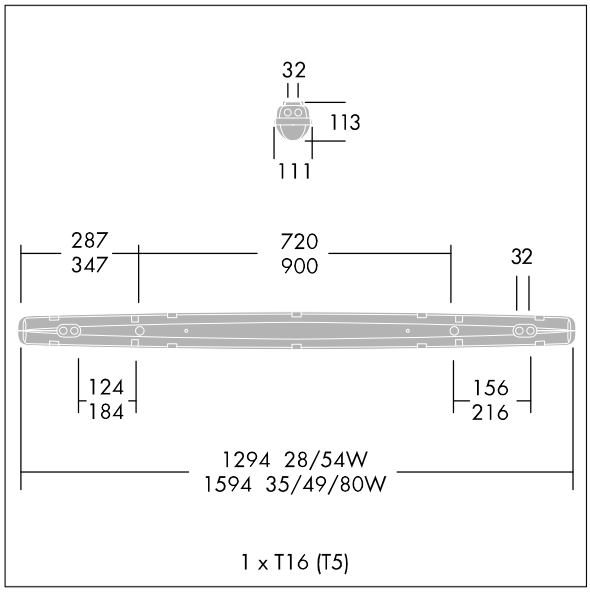

TLG_XFRC_M_SGLDT16.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

CorrosionForce II

96240455 CORRF2 1X28W T16 HFI E3 L000

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting