Omega 2 T5

96549407 <OMEGA2 4x24 T16 HFI E3 EFL PR PET L000

THORN

Omega 2 T5

Recessed modular luminaire for 4 x 24W Light Source: 4 x T16 / 24W lamps. Electronic, DALI / DSI digital dimmable control gear with 3 hour, manual test, emergency lighting circuit. Body: white painted steel with prismatic polyethylene terephthalate glycol diffuser. For exposed tee grid 15 or 24mm, concealed grid with height 12 - 65mm (using wedge brackets) or plasterboard (using wedge brackets). Class I electrical, IP20. Electrical connection via factory fitted 6 x 2 x 1.5mm² piano key terminal block. Lamps to be ordered separately.

Dimensions: 597 x 597 x 59 mm
Luminaire input power: 99 W
Weight: 5.1 kg

TLG_OMGA_F_2T5EFL.jpg

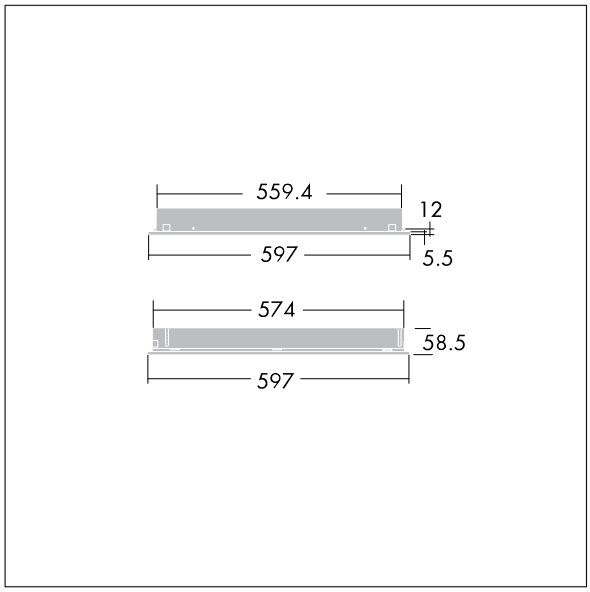

TLG_OMGA_M_2T5LD2.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega 2 T5

96549407 <OMEGA2 4x24 T16 HFI E3 EFL PR PET L000

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting