Olsys Area

96274077 <OLSYS1 10L70-740 A/S CL2

THORN

Olsys Area

An LED floodlight with asymmetric distribution for area lighting applications. Electronic,. Class II electrical, IP66, IK08. Body: die-cast aluminium (AS9U), powder coated silver-grey (RAL 9006). Enclosure: clear polycarbonate. Optics: polycarbonate. Supplied in one box, ready to install. Mounting attachments to be ordered separately. Complete with 4000K LED

Dimensions: 330 x 225 x 59 mm
Luminaire input power: 24 W
Weight: 2.75 kg
Scx: 0.07 m²

TLG_OSYS_F_1ASPDB.jpg

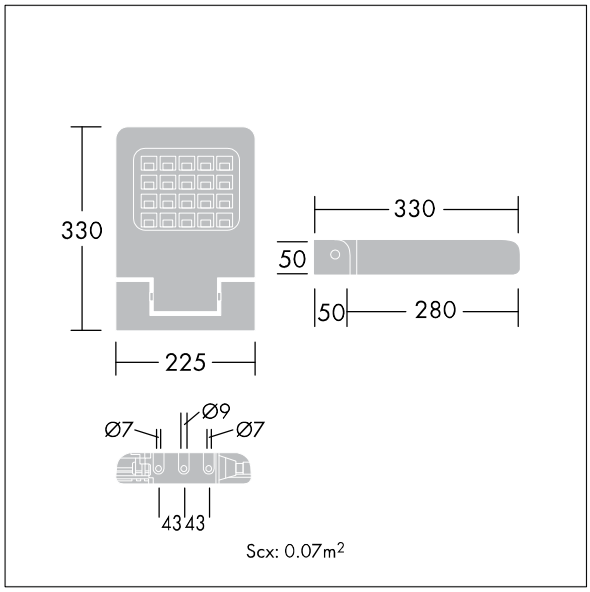

TLG_OSYS_M_AREA1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Olsys Area

96274077 <OLSYS1 10L70-740 A/S CL2

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting