Random

96190997 <PRISMA 2X28W E3 CL

A range of slim T5 fluorescent luminaires with prismatic diffusers for surface and wall mounting.

Slim surface mounted IP44 fluorescent luminaire for 2 x 28W Light Source: 2 x T16 / 28W lamp(s) with electronic - fixed output gear and 3 hour, manual test emergency lighting circuit. Body in white painted galvanized steel sheet with white plastic end caps and a clear polycarbonate diffuser. Keyhole fixing positions Ø14mm for direct mounting to ceiling, wall or brackets. Fixing centres: 1100mm. Two cable entries Ø19mm in the centre of the body. Grommets included. Piano key terminals 5 x 2 x 2. 5mm². Can be suspended using wire suspension accessory kit (to be ordered separately). Lamps to be ordered separately.

Dimensions: 1216 x 166 x 64 mm
Luminaire input power: 63.5 W
Weight: 3.6 kg
Luminaire efficacy: 67 lm/W

TLG_PRSM_F_01.jpg

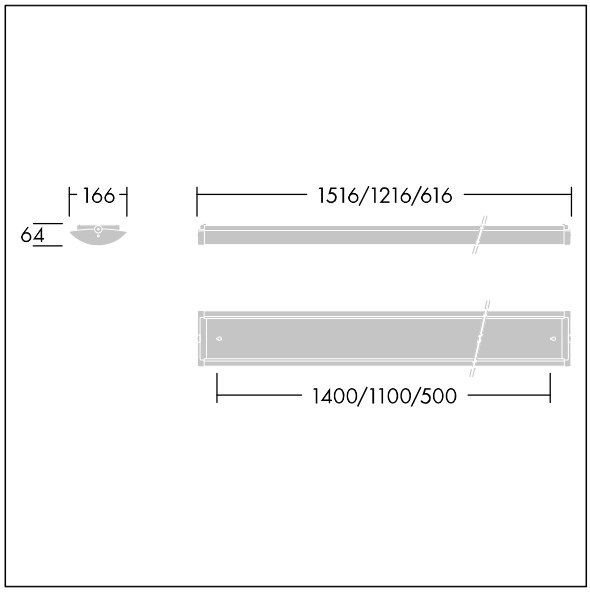

TLG_PRSM_M_LD4.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Random

96190997 <PRISMA 2X28W E3 CL

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting