Omega 2 T8

96504633 <OMEGA2 FAST 4X36 T26 HF E3 IS PRPET L84

THORN

Omega 2 T8

Recessed modular luminaire for 4 x 36W Light Source: 4 x T26 / 36W lamps with Combined HF & EM SC circuit and 3 hour manual test emergency lighting circuit. Body: white painted steel with double parabolic prismatic polyethylene terephthalate glycol diffuser. For lay-in to exposed tee grid 15 or 24mm only. Class I electrical, IP20. Electrical connection via factory fitted 4 x 2 x 1.5mm² piano key terminal block located on a hatch cut into the side of the body, allowing external access. Complete with 840 lamp(s).

Dimensions: 1224 x 595 x 80 mm
Luminaire input power: 145 W
Weight: 4.9 kg

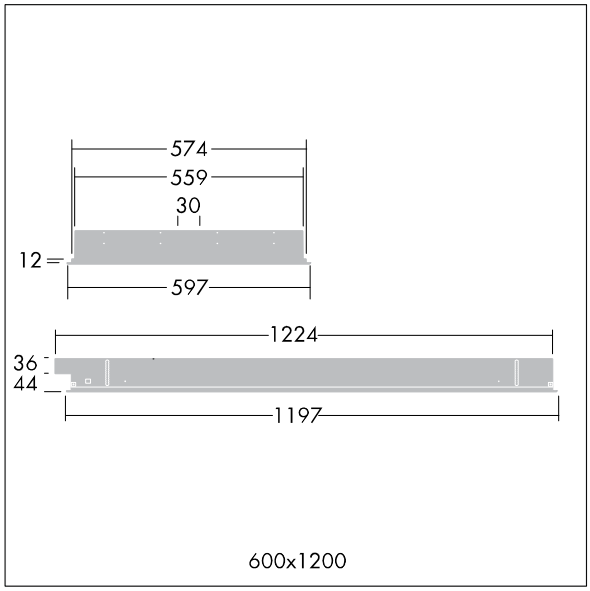

TLG_OMGA_M_2T84x36W.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting