




Victoria

Street and urban lantern combining advanced performance with aesthetics through the use of an illuminated canopy

- IP65 seal ensures long life of components and through life performance
- Efficient lamp packages and dimming options for immediate energy savings
- Features for fast maintenance and installation, plus 'twist and lock' hinge for easy access to components
- Choice of fixings for post-top or side entry mounting



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

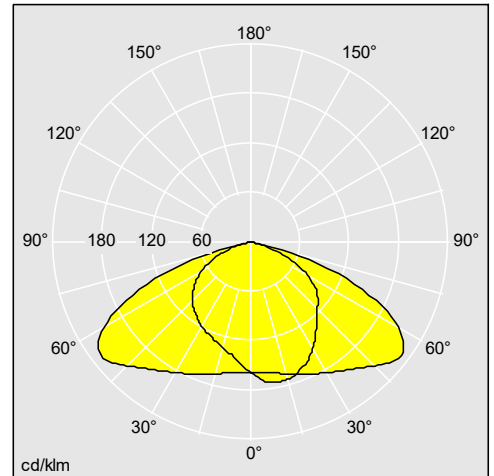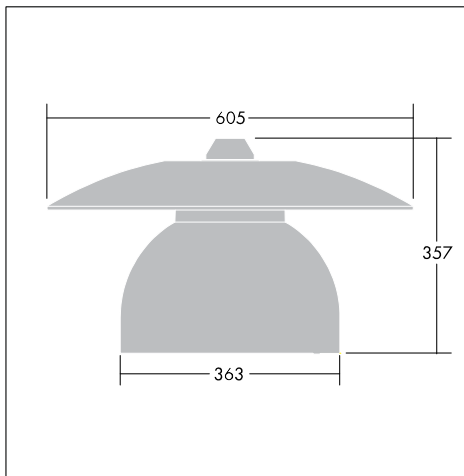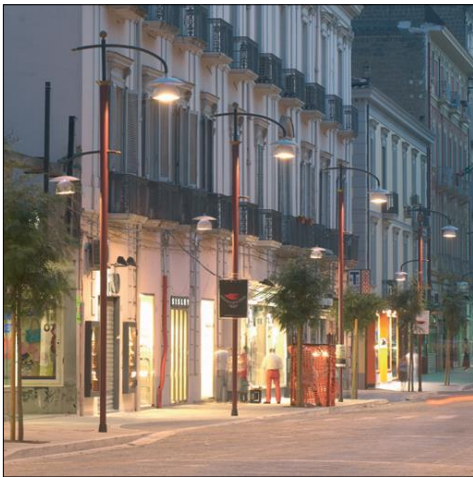

Material/Finish

Body: aluminium powder coated NCS0500 (White)

Canopy: ABS white

Spigot: corrosion protected steel

Enclosure: 4mm clear toughened glass

Screws and clips: stainless steel

(EN AC-44300).

Standard corrosion class C5 according to ISO 9223: 2012.

Installation/Mounting

Mounting spigot of female 3/4" pipe thread type (for Ø27G male threaded tube). Large choice of fixings for post-top or side entry (see Columns section of the catalogue). Cable gland for Ø6mm to Ø13mm cable. Access from below to gear and optic system after quick release of the hinged glass enclosure via 'twist and lock' design. Automatic disconnection of the electrical mains when opening. Mounting plate with optics and ballast has hinge suspension and stays attached when released. Tool free connection to 2x2.5mm² terminal. Complete with wired 8m (W8) or 10m (W10) cable.