



## Olsys Street

**Versatile and sober street lantern employing a state-of-the-art LED engine for performance and efficiency**

- State-of-the-art LED engine in line with EN13201 and European recommendations (ULOR 0%, above 70lm/W in 4000K) to cover projects up to ME3
- Complete with power reduction to reduce energy consumption during the night
- Exceptionally low cost of ownership with an optimised heat management system to provide a lifetime up to 80,000 hours (L70, 25°) without dimming
- Discreet design is coordinated with Olsys Area luminaires and available with a wide choice of mounting types and column packages



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

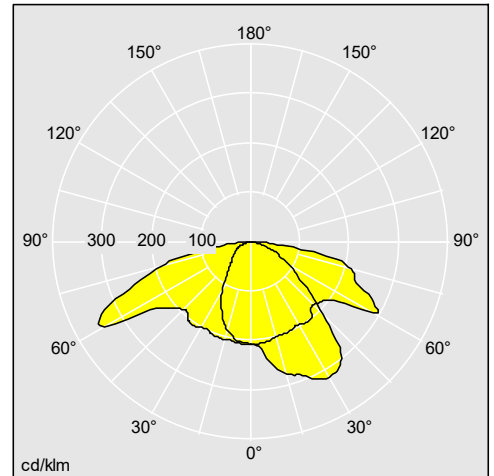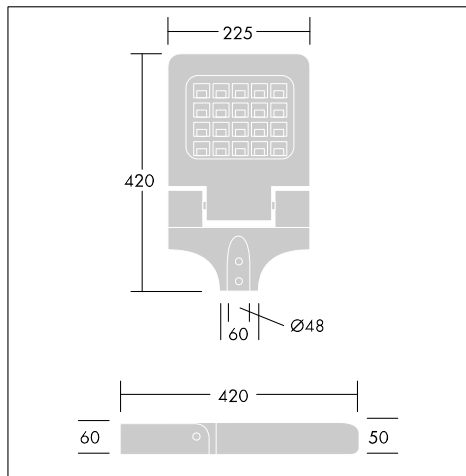

96274078

### Material/Finish

Body: die-cast aluminium (AS9U), standard corrosion class: C3,  
powder coated silver grey 9006 finish  
Enclosure: size 1 clear UV stabilised PC  
size 2: tempered glass  
Optics: size 1 PC, size 2 micro reflectors in highly reflective anodised aluminium  
Screws: stainless steel  
Brackets and mounting accessories: aluminium

### Installation/Mounting

Fitting and mounting accessories delivered separately.  
Product supplied pre-wired with connector  
Recommended mounting heights:  
Olsys Street 1: 4m  
Olsys Street 2 : 6 to 8m  
Coordinated columns and brackets: cylindro-conical or curved  
Access to gear (replaceable) via 4 screws from the canopy  
Suitable for ambient temperature range -30 to 50°C