



Dyana

A high quality LED luminaire to enhance efficiently urban roads and streets up to Me2

- Flexibility of use: 13 lumen outputs (up to 21500 lm), top or lateral mountings and two optics to cover a wide range of lighting projects from S to Me2 classes
- High performance Thorn R-PEC road and street lighting LED optic with high efficiency (up to 150 lm/W)
- Durable IP66 and IK10 luminaire made of high quality die-cast aluminium
- Coordinated with new brackets and columns for a full harmonised architectural project



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

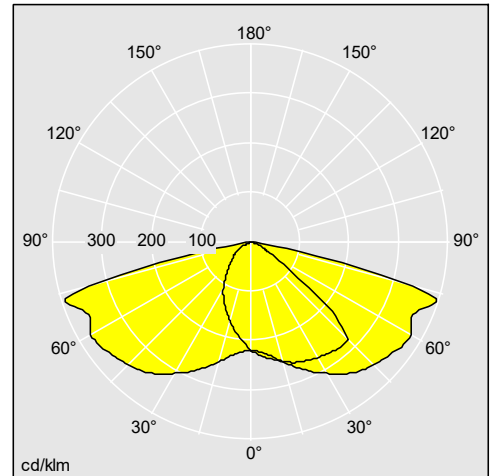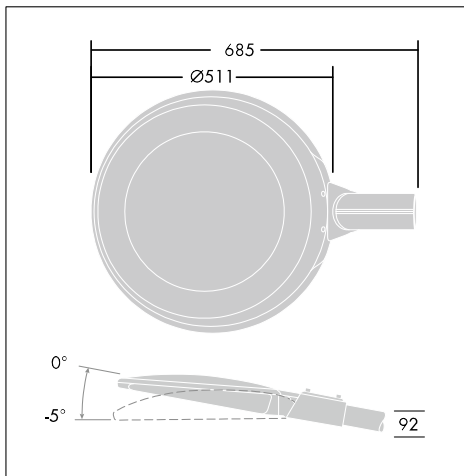

96264391

Material/Finish

Body, spigot and canopy: die-cast aluminium (EN AC-47100), power coating textured dark grey finish. Standard corrosion class: C3.

Flat glass cover: 5mm thick toughened glass.

Gasket: Ethylene Propylene Diamine rubber (EPDM).

Installation/Mounting

Optimised narrow road (NR) and wide street (WS) optic for good control and comfort. Dedicated range of Dyana (Thorn range) columns and brackets.

Side entry mounting Ø 60mm, tilt = 0°, -5°. Post top mounting Ø 60mm and Ø 76mm as standard, tilt 5°, 10°. End cap secured by 2 screws.

Slim section only 92mm thick. Opening from above. Supplied complete and ready to install, in a single box. Weight: 12 kg max.

Supplied complete and ready to install, in a single box. Weight: 15kg max. Option for Ø 76 mm mounting with spigot accessory.