



Victor

Road and street lantern combining advanced performance with a modern and timeless styling

- IP66 seal ensures long life of components and through life performance
- Features for fast maintenance and installation, plus 'twist and lock' hinge for easy access to components
- Choice of fixings for post-top, side entry or catenary mounting



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

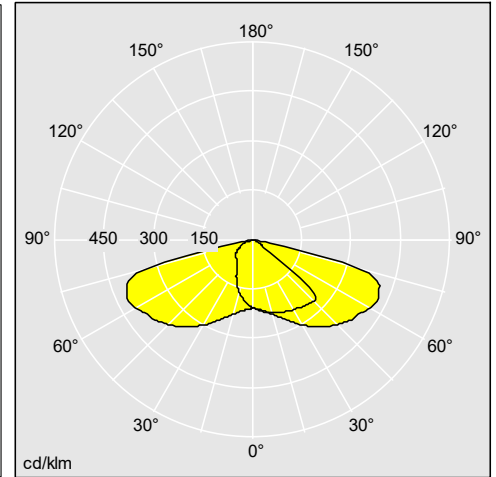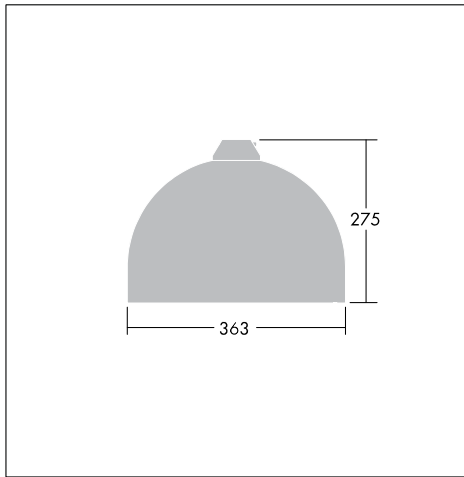

96221878

Material/Finish

Body: aluminium powder coated NCS0500 (White)

Spigot: corrosion protected steel

Enclosure: 4mm clear toughened glass

Screws and clips: stainless steel

(EN AC-44300).

Standard corrosion class C5 according to ISO 9223: 2012.

Installation/Mounting

Mounting spigot of female 3/4" pipe thread type (for Ø27G male threaded tube). Large choice of fixings for post-top, side entry or catenary (see Columns section of the catalogue). Cable gland for Ø6mm to Ø13mm cable. Access from below to gear and optic system after quick release of the hinged glass enclosure via 'twist and lock' design. Automatic disconnection of the electrical mains when opening. Mounting plate with optics and control gear has hinge suspension and stays attached when released. Tool free connection to 2x2.5mm² terminal. Complete with wired 8m (W8) or 10m (W10) cable.