




## Quattro +

**Recessed T26 (T8) fluorescent luminaires designed specifically for 625x625mm exposed grid ceilings.**

- Square and linear options for integration into different ceiling types
- Versions with dimmable, analogue or digital control, control gear to special order
- Choice of mirrorbrite louvres for low glare applications or general purpose louvres



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

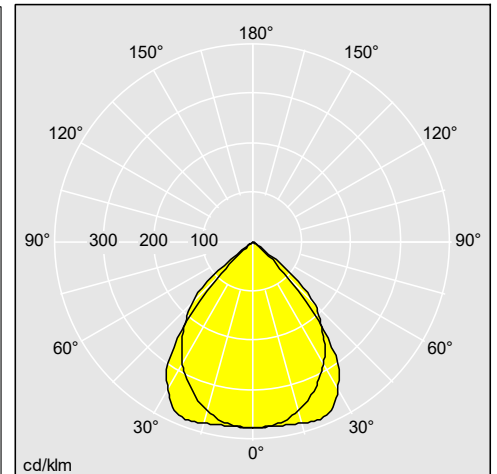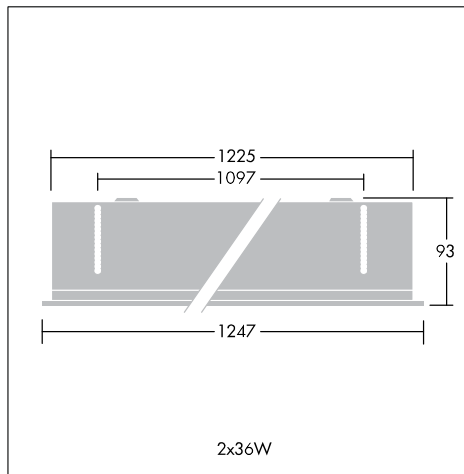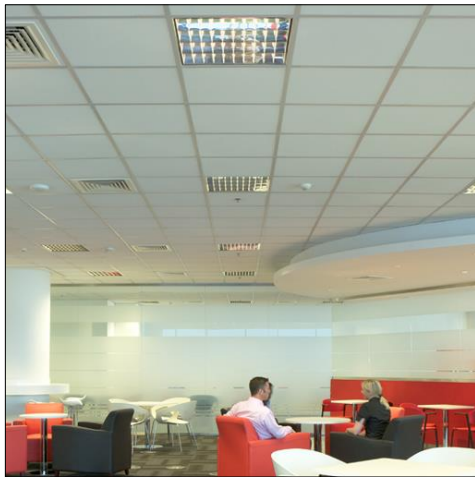

### Material/Finish

Body: white painted steel close to RAL 9010  
Louvre: low iridescent aluminium

### Installation/Mounting

Quick and easy to install in exposed tee ceilings using "wedge" support brackets. Attachments are held in place by wishbone springs which act as hinges for hands free maintenance and ensure continuous earthing.