



7297 D

A range of corrosion proof fluorescent luminaires with three types of diffuser materials for aggressive environments

- A choice of T16 (T5) or T26 (T8) lamps
- All electrical components are mounted on a hinged and removable gear tray
- EPDM gasket between canopy and diffuser ensures IP67 seal
- Choice of distributions for enhanced optical performance. (Symmetrical or asymmetrical)



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

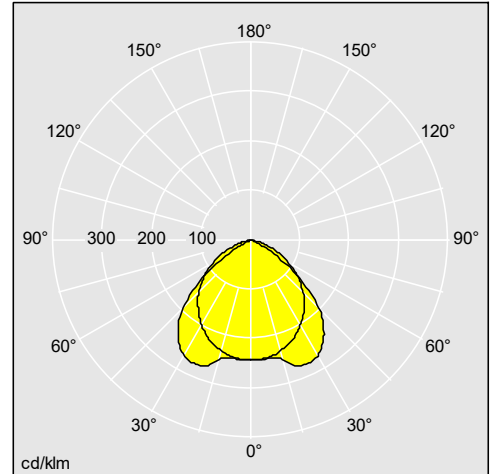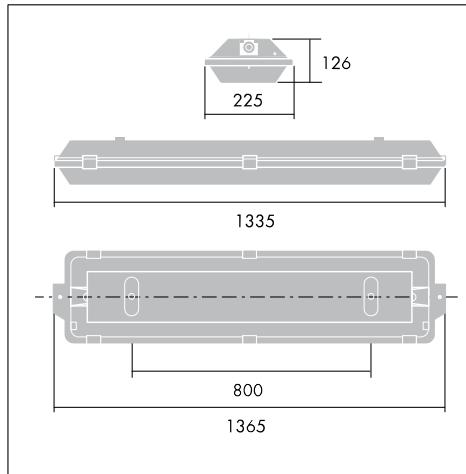

96005545

Material/Finish

Canopy: glass reinforced polyester

Diffuser: clear, injection moulded acrylic (AC); clear, injection moulded impact-resistant polycarbonate (PC); opalized, injection moulded, chemical and impact resistant acrylic KEMSEG (KM)

Reflectors: aluminium

Installation/Mounting

Ceiling, wall or catenary mounted. Adjustable brackets and catenary suspension as accessories.

Connection: cable entry through compression gland Ø22.5mm in each end. 2x5x2.5mm² terminal blocks with 3-phase through wiring. Stainless steel toggles clamp diffuser to canopy.