

# Optus IV Suspended

96206827 OPTUS IV DI 2x54W HF GRY DSB ML

THORN

## Optus IV Suspended

A suspended luminaire with a modern slim design, suitable for both office and school applications. For 2 x 54W T16 lamp(s) with electronic - fixed output ballast. 60:40 direct/indirect light distribution. Rated IP20, Class I electrical. Body in extruded aluminium with powder coated grey finish. End caps in die-cast zinc, and satinbrite louvre in anodised aluminium. Delivered with 2.6m 3 x 0.75mm<sup>2</sup> non halogen cable. Pre-mounted Quick Lock wire suspension kit included. Lamps to be ordered separately.


Total power: 120 W

Dimensions: 1209 x 165 x 61 mm

Weight: 2.6 kg



TLG\_OPT4\_F\_DISGL.jpg

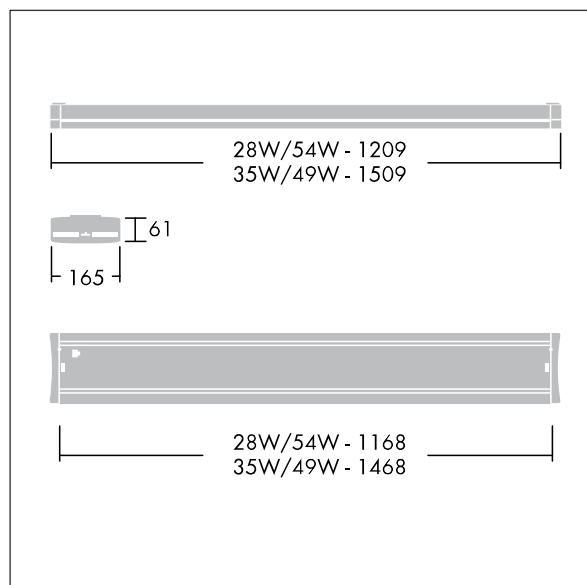

TLG\_OPT4\_M\_SUSP.wmf

All values marked with an \* are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting