

Optus IV Surface

96209558 OPTUS IV D 2X49W HFI GRY DSB L840

Optus IV Surface

A surface mounted and suspended luminaire with a modern slim design, suitable for both office and school applications. For 2x49W T16 lamp(s). Electronic, DALI / DSI digital dimmable control gear. Body: extruded aluminium with powder coated aluminium, matt grey finish. End Caps: die-cast zinc, and satinbrite louvre in anodised aluminium. Class I electrical, IP20. Electrical connection via factory fitted 5 x 2 x 2.5 mm² piano key terminal block and cable clamp. Key hole fixing centres 1300mm. Complete with 840 lamp(s).


Dimensions: 1509 x 165 x 61 mm

Total power: 105.5 W

Weight: 3 kg



TLG_OPT4_F_2SURGRYSB.jpg

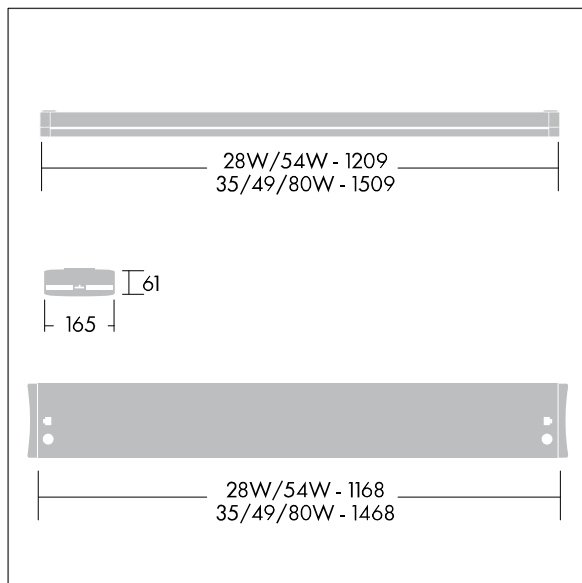

TLG_OPT4_M_SLD1a.wmf