

Titus 2C

22665791 TITUS 2C LED13000-850 L1200 HF SA

THORN


Titus 2C

A suspended linear LED high bay. Electronic, fixed output control gear. Body: extruded aluminium, powder coated silver. Optics: Linear PC lens and diffuser for a comfortable lighting effect. Mains voltage: 220-240VAC / 50-60Hz. Complete with 3000K LED.

Dimensions: 1200 x 139 x 96 mm
Luminaire input power: 108.3 W
Luminaire luminous flux: 13014 lm
Luminaire efficacy: 120 lm/W
Weight: 3.53 kg



TLG_TT2C_F_HF_SA.jpg

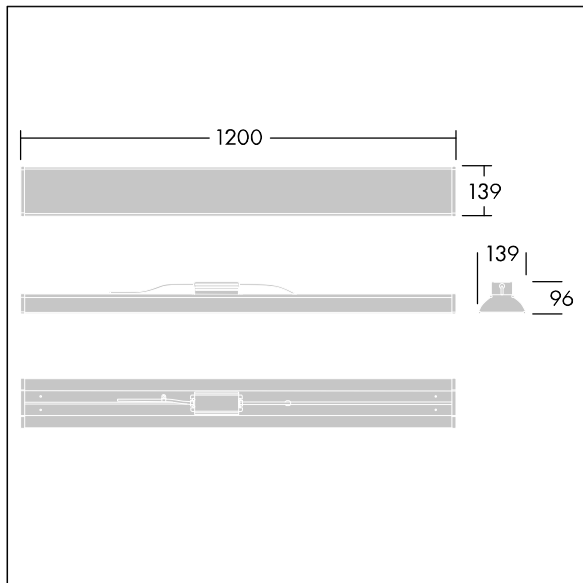

TLG_TT2C_M_HF_SA.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Titus 2C

22665791 TITUS 2C LED13000-850 L1200 HF SA

THORN