

Moduline LED II

22661242 Moduline LED II 312 2200lm HF L830 C

THORN


Moduline LED II

A cost effective ceiling recessed LED luminaire. Electronic, fixed output control gear. Class I electrical. IP20, IK02.
Body: white painted steel. Diffuser: opal polystyrene plastic panel. Electrical connection via flap in rear of body.
Complete with 3000K LED

Dimensions: 1197 x 297 x 63 mm
Luminaire input power: 22.2 W
Luminaire luminous flux: 2164 lm
Luminaire efficacy: 97 lm/W
Weight: 3.2 kg



TLG_MODL_F_312.jpg

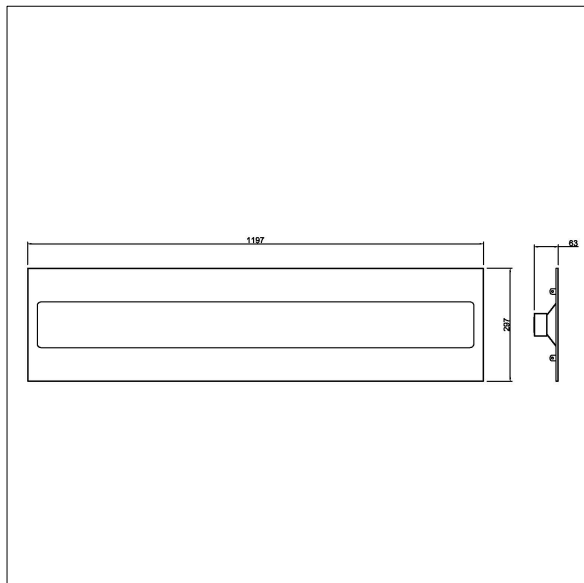

TLG_MODL_M_LD2.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Moduline LED II

22661242 Moduline LED II 312 2200lm HF L830 C

THORN