

# Moduline LED II

**22661243 Moduline LED II 312 2200lm HF L840 C**

THORN


## Moduline LED II

A cost effective ceiling recessed LED luminaire. Electronic, fixed output control gear. Class I electrical. IP20, IK02.  
Body: white painted steel. Diffuser: opal polystyrene plastic panel. Electrical connection via flap in rear of body.  
Complete with 4000K LED

Dimensions: 1197 x 297 x 63 mm  
Luminaire input power: 22.2 W  
Luminaire luminous flux: 2164 lm  
Luminaire efficacy: 97 lm/W  
Weight: 3.2 kg



TLG\_MODL\_F\_312.jpg

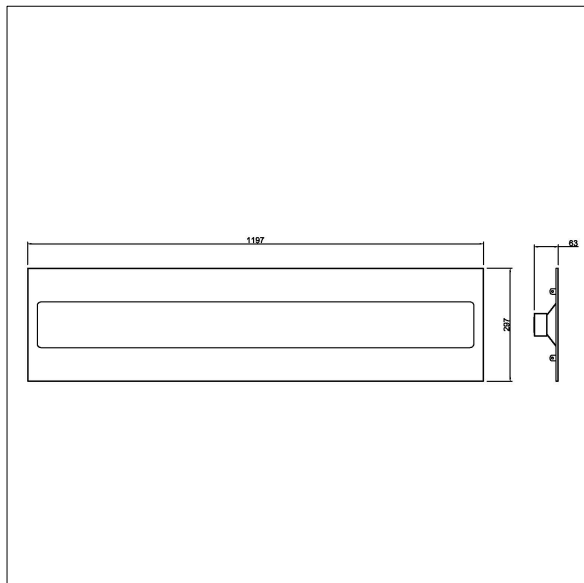

TLG\_MODL\_M\_LD2.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Moduline LED II

22661243 Moduline LED II 312 2200lm HF L840 C

THORN