

# ArrowFlex 2C

22665276 ARROWFLEX 2C LED400-827 IP44

THORN

## ArrowFlex 2C

5m length of compact and flexible LED strip for indirect and emotional lighting, cove lighting and backlighting for horizontal or vertical niches. Can be cut on site on pre-defined cutting marks. Self adhesive tape on the reverse, for surface mounting to straight, clean surfaces. 60 LED/m for high lighting homogeneity.


Complete with 2700K LED, 4.8W/m, 400 lm/m, 120° beam angle, IP44

Dimensions: 5000 x 10 x 4 mm  
Luminaire input power: 5.5 W  
Luminaire luminous flux: 559 lm  
Luminaire efficacy: 102 lm/W  
Weight: 0.6 kg

Rated median useful life: 50000h



TLG\_ARFC\_F\_PDB.jpg

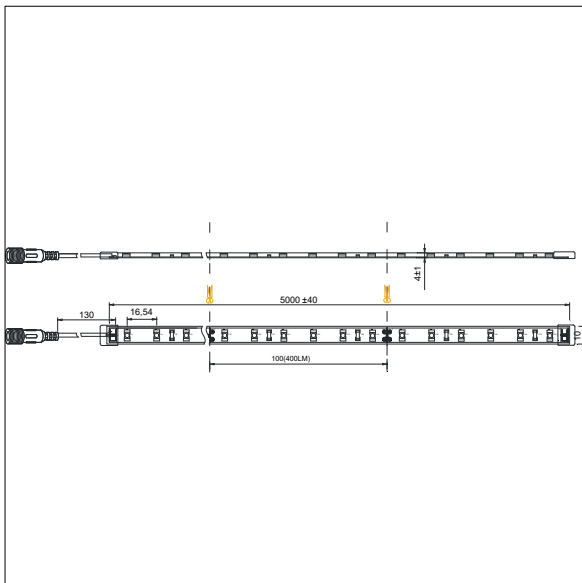

TL\_ARFC\_M\_400.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# ArrowFlex 2C

22665276 ARROWFLEX 2C LED400-827 IP44

THORN