

# ArrowFlex 2C

22665279 ARROWFLEX 2C LED800-827 IP44

THORN

## ArrowFlex 2C

5m length of compact and flexible LED strip for indirect and emotional lighting, cove-lighting and backlighting for horizontal or vertical niches. Can be cut on site on pre-defined cutting marks. Self adhesive tape on the reverse, for surface mounting to straight, clean surfaces. 120 LED/m for high lighting homogeneity.


Complete with 2700K LED, 9.6W/m, 800 lm/m, 120° beam angle, IP44

Dimensions: 5000 x 10 x 4 mm  
Luminaire input power: 9.4 W  
Luminaire luminous flux: 864 lm  
Luminaire efficacy: 92 lm/W  
Weight: 0.6 kg

Rated median useful life: 50000h



TLG\_ARFC\_F\_PDB.jpg

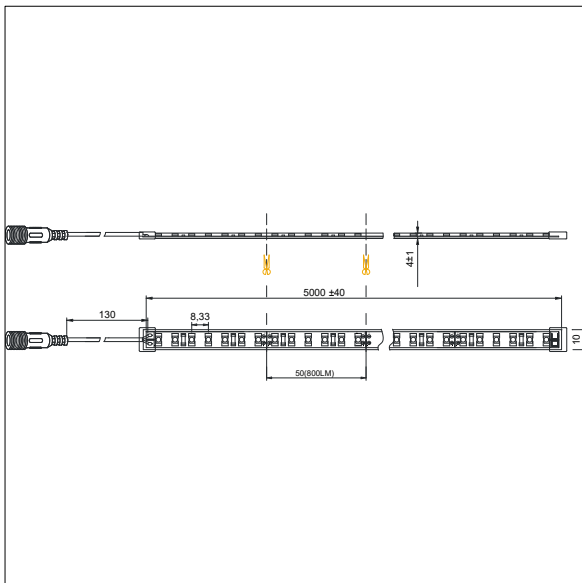

TL\_ARFC\_M\_800.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# ArrowFlex 2C

22665279 ARROWFLEX 2C LED800-827 IP44

THORN