

Raze Bollard

96631801 RAW 1L35-730 WP HFX CL1 6K ANT

Raze Bollard


A wall mounted LED luminaire, incorporating Thorn's Flat beam® technology. 1 LED driven at 350mA. Integral DALI dimmable LED driver included. Class I electrical, IP66, IK10. Housing: die-cast aluminium (EN44300, compatible with seaside installation), powder coated, textured anthracite (close to RAL7043). Bowl: UV stabilised polycarbonate, semi-frosted. Fasteners: stainless steel. Complete with 3000K LED.

6kV surge protection as standard.

Dimensions: 176 x 220 x 145 mm
 Luminaire input power: 15 W
 Luminaire luminous flux: 1142 lm
 Luminaire efficacy: 76 lm/W
 Weight: 2.77 kg



TLG_RAZB_F_HEAD_PDB.jpg

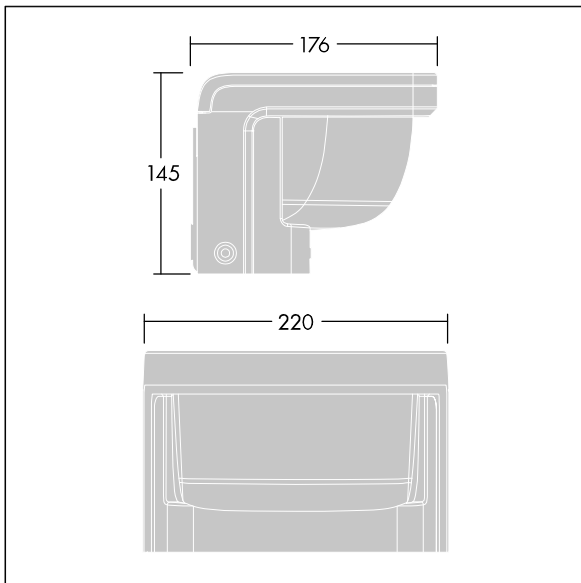

TLG_RAZB_M_HEAD.wmf

This product contains a light source of energy efficiency class D.

Raze Bollard

96631801 RAW 1L35-730 WP HFX CL1 6K ANT

THORN