

## Raze Bollard

96632090 RAW 1L20-830 WPC HF CL1 6K ANT

### Raze Bollard


A wall mounted LED luminaire, incorporating Thorn's Flat beam® technology. 1 LED driven at 200mA. Integral LED driver included. Class I electrical, IP66, IK10. Housing: die-cast aluminium (EN44300, compatible with seaside installation), powder coated, textured anthracite (close to RAL7043). Bowl: UV stabilised polycarbonate, semi-frosted. Fasteners: stainless steel. Complete with 3000K LED.

6kV surge protection as standard.

Dimensions: 176 x 220 x 145 mm  
 Luminaire input power: 9 W  
 Luminaire luminous flux: 403 lm  
 Luminaire efficacy: 45 lm/W  
 Weight: 2.77 kg



TLG\_RAZB\_F\_HEAD\_PDB.jpg

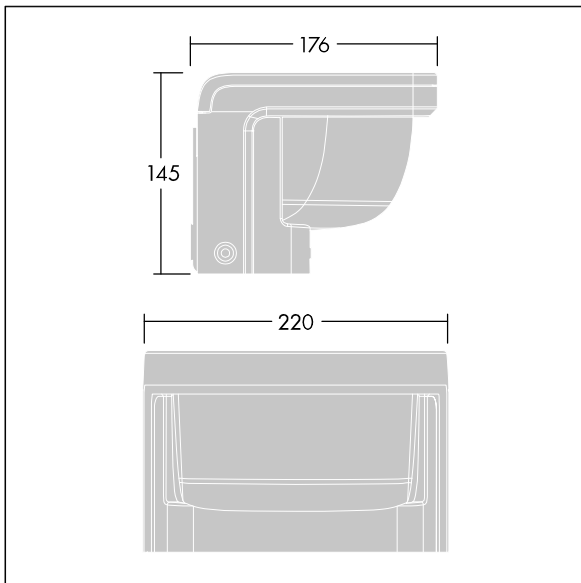

TLG\_RAZB\_M\_HEAD.wmf

This product contains a light source of energy efficiency class E.

# Raze Bollard

96632090 RAW 1L20-830 WPC HF CL1 6K ANT

THORN