

## Candle

96679085 CN 18L70 730 RSC CL1 W3 ANT


### Candle

Slim lighting column with 18 LEDs driven at 700mA with Radial symmetrical comfort light distribution. Fixed output LED driver. Class I electrical, IP66, IK10. Base: die-cast aluminium (EN AC-44300). Finish: powder coated aluminium, texturized anthracite (close to RAL7043). Diffuser: UV stabilised clear polycarbonate. Pre-wired with 3m cable. Column to be ordered separately. Complete with 3000K LED.

Dimensions: Ø234 x 559 mm  
 Luminaire input power: 38.9 W  
 Weight: 4.89 kg  
 Scx: 0.06 m<sup>2</sup>  
 Luminaire efficacy: 110 lm/W



TLG\_CNDL\_F\_2.jpg

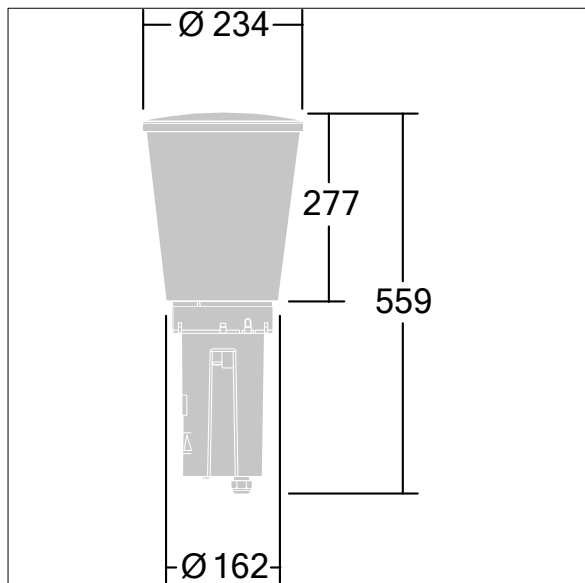

TLG\_CNDL\_M\_HEAD.wmf

This product contains a light source of energy efficiency class D.

# Candle

96679085 CN 18L70 730 RSC CL1 W3 ANT

THORN