

## Areaflood Pro 2

96635898 AFP2 2M 192L70-740 A4 CL2 GY

### Areaflood Pro 2


A compact, lightweight, general purpose LED area floodlight. With medium x 2 body. LED converter driving 192 LEDs at 700mA with Asymmetrical 40° light distribution. IP66, IK08, Class II electrical. Body: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006).. Enclosure: 4mm thick toughened glass. Reversible mounting stirrup supplied, Complete with 4000K LED.

Integrated 6kV surge protection included as standard, with higher 10kV protection when selected (designated by 'SP' in the description).

Dimensions: 630 x 722 x 116 mm  
 Luminaire input power: 392 W  
 Luminaire luminous flux: 63236 lm  
 Luminaire efficacy: 161 lm/W  
 weight: 23.78 kg  
 Scx: 0.12 m<sup>2</sup>



TLG\_AFP2\_F\_2M\_1.jpg

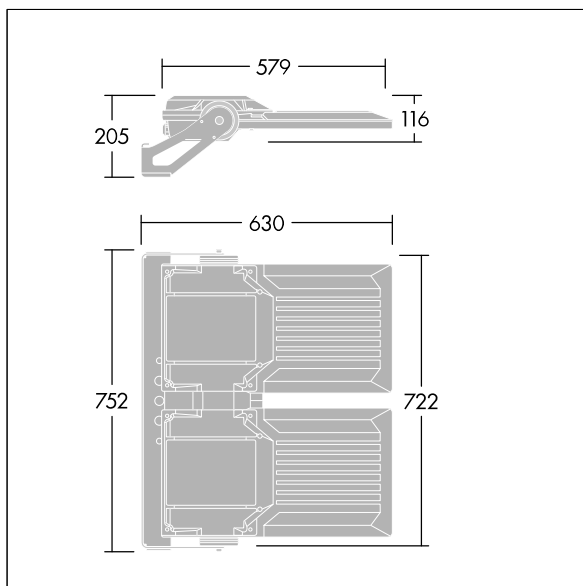

TLG\_AFP2\_M\_2M.wmf

This product contains light sources of energy efficiency classes D, E.