


## Moduline LED II

### A cost effective recessed LED louvre for offices and commercial lighting

- High bright LED module and high performance optics delivers optimal luminaire efficiency
- Air slot version available by request
- Lay in / pull up installation complies with most ceiling types
- 40% energy savings compared with T5 fluorescent

Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

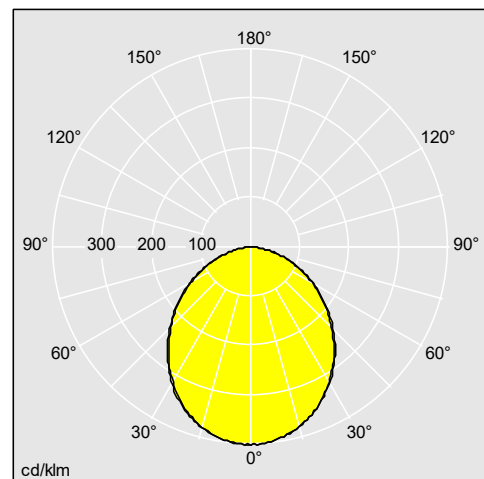

22661250

#### Material/Finish

Body: white painted steel  
Diffuser: opal PS plastic panel

#### Installation/Mounting

Suitable for surface or suspended mounting.  
Suitable for recessed installation of standard exposed tee grid ceilings. Lay-in and pull-up installation possible.  
Electrical connection to terminal block via flap in rear of body.

#### Ordering Guide Complete with LED's

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Moduline LED II</b>				
Moduline LED II 606 3200lm HF L830 C			3	22661374
Moduline LED II 606 3200lm HF L840 C			3	22661375
Moduline LED II 312 3200lm HF L830 C			3,2	22661376
Moduline LED II 312 3200lm HF L840 C			3,2	22661377
Moduline LED II 606 2200lm HF L830 C	LED		3	22661241
Moduline LED II 606 2200lm HF L840 C	LED		3	22661250
Moduline LED II 312 2200lm HF L830 C	LED		3,2	22661242
Moduline LED II 312 2200lm HF L840 C	LED		3,2	22661243