


Areapak Pro

A versatile area floodlighting LED luminaire suited for wide ranging weather climate

- Excellent thermal management ensures a lifespan up to 100 000 hours at ambient temperatures of 35°C
- Comprehensive optical solution to cover full scale of applications
- Fast payback and minimal Total Cost of Ownership with substantial energy saving
- Excellent control of spill light – 0cd at 90°



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

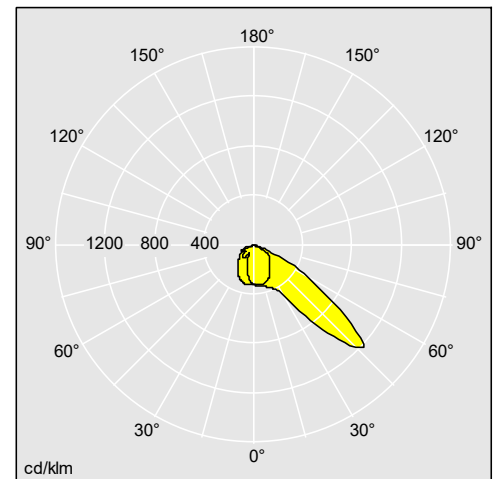

22664296

Material/Finish

Body: die-cast aluminium, painted grey RAL 9006
 Heatsink: die-cast aluminium, painted dark sandy grey RAL 7043
 Frame and stirrup: hot-dip galvanized steel
 Glass: 5mm toughened
 Screws: stainless steel

Installation/Mounting

Stirrup can be fixed by one Ø22mm, two Ø15mm holes and/or two Ø12mm holes.
 Stirrup is reversible for hangdown position. Integral gear tray, access by removal of canopy via 4 allen screws. Supply via cable gland for Ø8-12mm cable.

Areapak Pro

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Areapak Pro Medium, asymmetric				
APP M 72L70 L740 A15 CL1 100H	LED		17,4	22664295
APP M 72L70 L740 A45 CL1 100H	LED		17,4	22664296
APP M 72L70 L740 A60 CL1 100H	LED		17,4	22664297
APP M 72L70 L840 A15 CL1 100H	LED		17,4	22664340
APP M 72L70 L840 A45 CL1 100H	LED		17,4	22664332
APP M 72L70 L840 A60 CL1 100H	LED		17,4	22664333
Areapak Pro Medium, symmetric				
APP M 72L70 L740 S15 CL1 100H	LED		17,4	22664298
APP M 72L70 L740 S30 CL1 100H	LED		17,4	22664299
APP M 72L70 L740 S45 CL1 100H	LED		17,4	22664331
APP M 72L70 L840 S15 CL1 100H	LED		17,4	22664334
APP M 72L70 L840 S30 CL1 100H	LED		17,4	22664335
APP M 72L70 L840 S45 CL1 100H	LED		17,4	22664336
Areapak Pro Large, asymmetric				
APP L 120L70 L840 A15 CL1 100H	LED		19,8	22664355
APP L 120L70 L840 A45 CL1 100H	LED		19,8	22664356
APP L 120L70 L840 A60 CL1 100H	LED		19,8	22664357
APP L 144L70 L740 A15 CL1 100H			19,8	22664370
APP L 144L70 L740 A45 CL1 100H			19,8	22664362
APP L 144L70 L740 A60 CL1 100H			19,8	22664363
APP L 96L70 L740 A15 CL1 100H	LED		19,8	22664337
APP L 96L70 L740 A45 CL1 100H	LED		19,8	22664338
APP L 96L70 L740 A60 CL1 100H	LED		19,8	22664339
APP L 96L70 L840 A15 CL1 100H	LED		19,8	22664343
APP L 96L70 L840 A45 CL1 100H	LED		19,8	22664344
APP L 96L70 L840 A60 CL1 100H	LED		19,8	22664345
APP L 120L70 L740 A15 CL1 100H	LED		19,8	22664349
APP L 120L70 L740 A45 CL1 100H	LED		19,8	22664351
APP L 120L70 L740 A60 CL1 100H	LED		19,8	22664360
APP L 144L70 L840 A15 CL1 100H			19,8	22664371
APP L 144L70 L840 A45 CL1 100H			19,8	22664380
APP L 144L70 L840 A60 CL1 100H			19,8	22664372
Areapak Pro Large, symmetric				
APP L 120L70 L840 S15 CL1 100H	LED		19,8	22664358
APP L 120L70 L840 S30 CL1 100H	LED		19,8	22664359
APP L 120L70 L840 S45 CL1 100H	LED		19,8	22664361
APP L 144L70 L740 S15 CL1 100H			19,8	22664364
APP L 96L70 L740 S15 CL1 100H	LED		19,8	22664341
APP L 96L70 L740 S30 CL1 100H	LED		19,8	22664350
APP L 96L70 L740 S45 CL1 100H	LED		19,8	22664342
APP L 96L70 L840 S15 CL1 100H	LED		19,8	22664346
APP L 96L70 L840 S30 CL1 100H	LED		19,8	22664347
APP L 96L70 L840 S45 CL1 100H	LED		19,8	22664348

Areapak Pro

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
APP L 120L70 L740 S15 CL1 100H	LED		19,8	22664352
APP L 120L70 L740 S30 CL1 100H	LED		19,8	22664353
APP L 120L70 L740 S45 CL1 100H	LED		19,8	22664354
APP L 144L70 L740 S30 CL1 100H			19,8	22664208
APP L 144L70 L740 S45 CL1 100H			19,8	22664209
APP L 144L70 L840 S15 CL1 100H			19,8	22664373
APP L 144L70 L840 S30 CL1 100H			19,8	22664374
APP L 144L70 L840 S45 CL1 100H			19,8	22664375