



Piazza II LED

A robust IP65 outdoor wall mounted luminaire with a unique light distribution, ideal for building perimeter applications

- Unique photometrics with 3 metre forward light throw and 12 metre spacing - ideal for perimeter walkways
- Very low upward light throw with less than 2.5% ULOR
- Excellent 116 lm/W efficiency
- Easy installation, back mounted, BESA and surface mounted conduit compatible



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

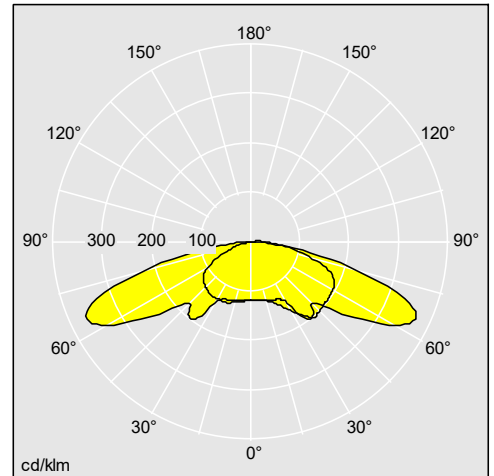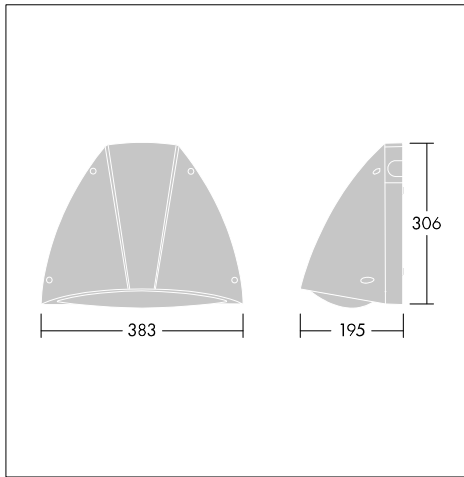

96666256

Material/Finish

Back-plate: die-cast aluminium painted anthracite (RAL7016)
 Body: polycarbonate In anthracite colour (RAL 7016)
 Diffuser: textured clear polycarbonate

Installation/Mounting

Wall mountable. Ø20 mm cable entry via rear or side conduit entries. Recommended 3-4 metre mounting height.

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Piazza II LED				
PIAZZA II LED 1690-840 HF ANT	LED		2,8	96666256
PIAZZA II LED 1690-840 HF P ANT	LED		2,8	96666259
PIAZZA II LED 2700-840 HF ANT	LED		2,8	96666261
PIAZZA II LED 2700-840 HF P ANT	LED		2,8	96666264
PIAZZA II LED 1690-830 HF ANT	LED		2,8	96632757
PIAZZA II LED 1690-830 HF P ANT	LED		2,8	96632758
PIAZZA II LED 2700-830 HF ANT	LED		2,8	96632759
PIAZZA II LED 2700-830 HF P ANT	LED		2,8	96632760

Piazza II LED

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Piazza II LED, emergency				
PIAZZA II LED 1690-840 HF E3 ANT	LED		3,1	96666257
PIAZZA II LED 1690-840 HF E3TX ANT	LED		3,1	96666258
PIAZZA II LED 2700-840 HF E3 ANT	LED		3,1	96666262
PIAZZA II LED 2700-840 HF E3TX ANT	LED		3,1	96666263
Piazza II LED, dimmable				
PIAZZA II LED 1690-840 HFI-X EC ANT	LED		2,8	96666260
PIAZZA II LED 2700-840 HFI-X EC ANT	LED		2,8	96666265