



QbaMAX LED

A highly cost competitive rectangular LED floodlight for facade lighting applications

- Very compact structure, best suited for limited installation space
- Professional heatsink design to guarantee 50khrs lighting performance
- Easy for tilting with adjustable mounting bracket when focusing the light



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

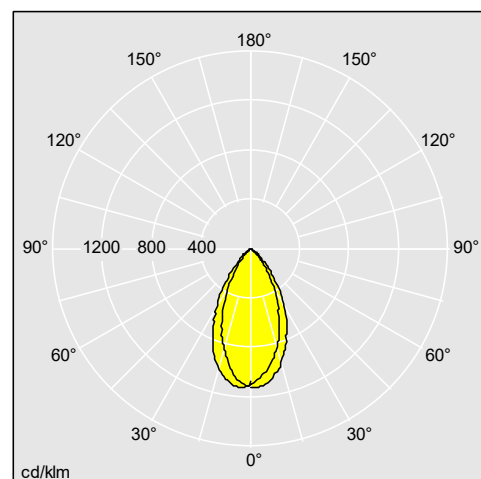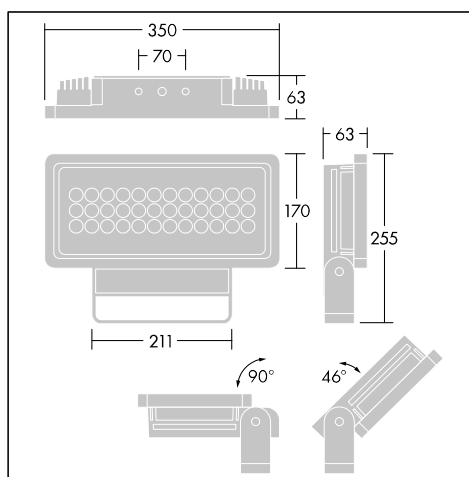

22665373

Material/Finish

Body: Anodized Aluminium
Front cover: Tempered Glass

Installation/Mounting

Surface: Put the LED floodlight with mounting bracket on the predefined installation location, use two stainless steel type screws (M8 size) to fix the mounting bracket firmly; connect the power cable of the LED floodlight, positive (Red) & negative (Black) with a 24VDC LED transformer.

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
QbaMAX LED				
QBAMAX LED G2 830 36W 60D	LED	LED	3,9	22665373
QBAMAX LED G2 840 36W 60D	LED	LED	3,9	22665376