


Formula LED

A high energy saving solution of LED linear type luminaire suitable for any lighting application

- IP65 ingress protection as standard replace the traditional fluorescent batten perfectly
- Opal diffuser offers a comfortable lighting effect
- Simple and elegantly designed linear type aluminium base luminaire suited for any lighting application
- Professional heatsink designed to guarantee 50khrs lighting performance



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

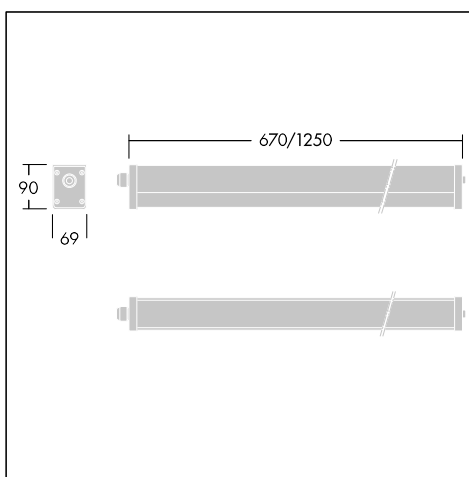

Material/Finish

Body: Extruded Aluminium alloy with white powder coating

Diffuser: PC opal

End cap: Die-cast Aluminium with white powder coating

Installation/Mounting

Surface mounted: Install the mounting clip (2x) by M4 x 30 SS screw (2x) based on the suggested location. Remove 4pcs of screws from the end cap for connecting the 220VAC Mains power, after that, make sure to secure the 4pcs of screws back to the end cap. Put the luminaire to the mounting clip until a "click" sound is heard for completion

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Formula LED				
FORMULA LED2000-865 L1250 HF IP65	LED		2,2	22666195
FORMULA LED4000-865 L1250 HF IP65	LED		2,2	22666196