


## Titus 2C

### An energy-efficient linear LED high bay suitable for logistic applications

- An easy-to-use linear highbay for general logistic applications with optimized initial investment
- Extruded aluminium body serves as an effective heat sink for excellent thermal management
- Built-in linear LED lens to provide medium beam distribution



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

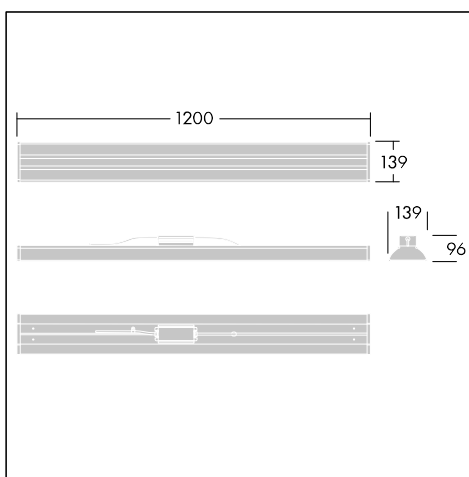

### Material/Finish

Body: Extruded aluminium with silver powder coating  
Optics: PC lens  
End cap: PC

### Installation/Mounting

Suspend mounted: Make 2 holes with size M6 x 30mm in the ceiling, put in plastic anchor and fix the suspension wire holder firmly, pass the suspension wire through the holder and set the required installation height for the luminaire, finally, connect the 220VAC Mains power to the LED transformer.

### Ordering Guide Complete with LEDs.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Titus 2C</b>				
TITUS 2C LED15000-850 L1200 HF	LED		3,23	22665790
TITUS 2C LED13000-850 L1200 HF SA	LED		3,53	22665791