



Tonpak

A high performance LED floodlight suitable for a wide range of area lighting applications with significant energy savings

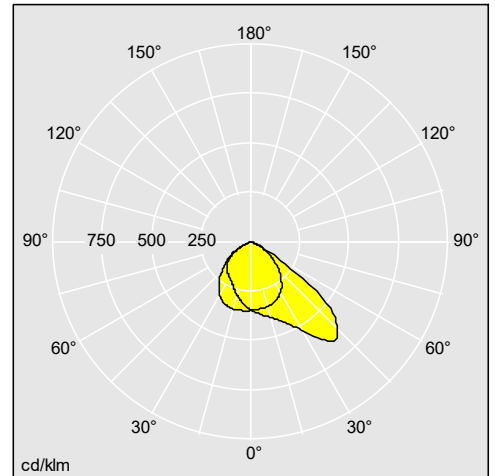

Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

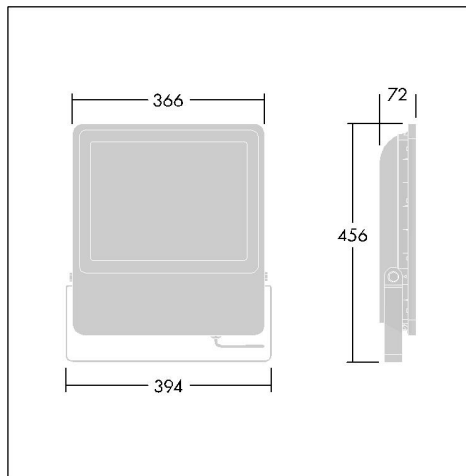

22666316

Material/Finish

Body: Die-cast Aluminium painted in grey RAL9006

Lens: PC

Glass: 4mm thick toughened

Installation/Mounting

Surface mounted:

Place the LED floodlight with mounting bracket on the predefined installation location, use two stainless steel type screws and nuts (M10 size for 50/75/100W; M12 size for 150/200W) to fix the mounting bracket firmly. Connect mains power to the power cable of the LED floodlight.

Tonpak

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Tonpak				
TONPAK LED G2 50W 840 100X50 CL1	LED		4,5	22666314
TONPAK LED G2 75W 840 100X50 CL1	LED		4,5	22666315
TONPAK LED G2 100W 840 100X50 CL1	LED		4,5	22666316
TONPAK LED G2 150W 840 100X50 CL1	LED		6,6	22666317
TONPAK LED G2 200W 840 100X50 CL1	LED		6,6	22666318