


## Chalice 2C

### An aesthetically designed downlight with flexible application and installation options

- Versatile LED downlight serving end-users with a high quality good performance product
- Reliable lighting equipment which complies with widely adopted safety standards and regulations
- Comprehensive product profile and accessories provides a range of options fitting different user scenarios
- Simple but modern design offers easy incorporation into architectural designs with different usages



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

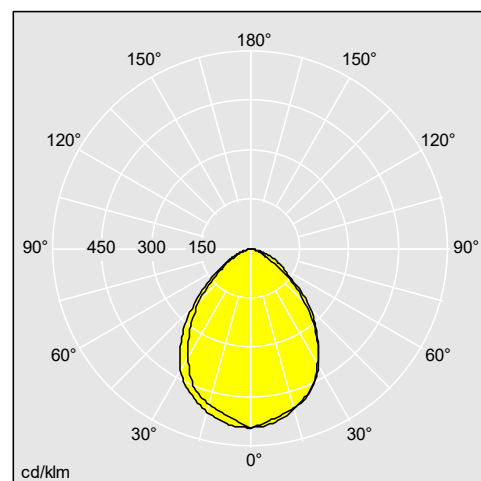

22667690

### Material/Finish

Body: anodized aluminium

Diffuser :PC

Mounting bracket: Coated steel sheet metal

### Installation/Mounting

Recessed mounting are available in Chalice 2C. Cutting the ceiling with 155mm or 170mm holes (depends on 6" or 8" inch model chosen), fix the product with the spring clips on 1-25mm ceiling opening.

### Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Chalice 2C</b>				
CHAL 2C 150 LED1400-830 HF	LED		0,42	22667685
CHAL 2C 150 LED1400-840 HF	LED		0,42	22667686
CHAL 2C 150 LED1400-840 HFA	LED		0,42	22667687
CHAL 2C 150 LED1400-840 HFX	LED		0,42	22667688
CHAL 2C 150 LED2000-830 HF	LED		0,42	22667689
CHAL 2C 150 LED2000-840 HF	LED		0,42	22667690
CHAL 2C 150 LED2000-840 HFA	LED		0,42	22667691
CHAL 2C 150 LED2000-840 HFX	LED		0,42	22667692

## Chalice 2C

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
CHAL 2C 200 LED2500-830 HF	LED		0,44	22667693
CHAL 2C 200 LED2500-840 HF	LED		0,44	22667694
CHAL 2C 200 LED2500-840 HFA	LED		0,44	22667695
CHAL 2C 200 LED2500-840 HFX	LED		0,44	22667696