

# Alumet Stage II

THORN

96275333 ALUMET ST HEAD 4X105 WHITE CL2 D4M3

## Alumet Stage II

Head of the architectural lighting column Alumet Stage II, with Electronic, fixed output control gear for 4 x LED spots. Diffuser: UV resistant polycarbonate with anti graffiti varnish. Top cap, base and spot frames made of die-cast aluminium. Spine: steel. Pre-wired with 4m cable. Class II electrical, 220/240V, IK10, IP66. To be mounted on an Alumet column. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Lamps to be ordered separately.

Height: 1250mm


Luminaire input power: 56 W

Weight: 9.2 kg

Windage: 0.079m<sup>2</sup>



TLG\_ALS2\_F\_HEAD\_4.jpg

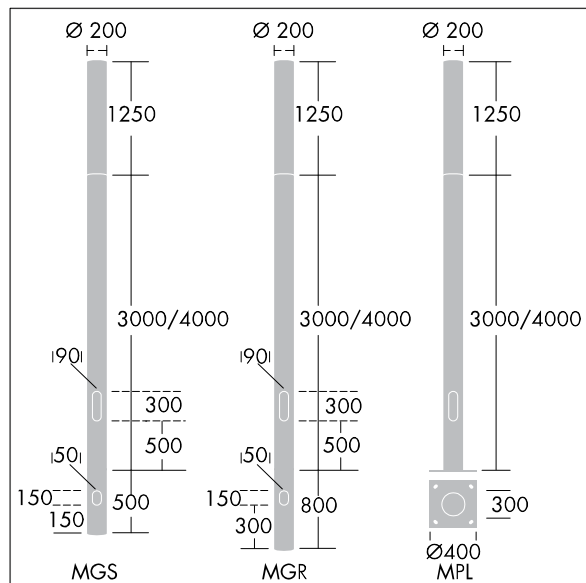

TLG\_ALUM\_M\_2LD1.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting